

Passer til standard flensmål.



Hardhet: 60 Shore.

Temperaturområde: -10 °C til over +100 °C.

Høy motstand mot UV og ozon.

Tykkelse  $s = 3$  mm.

Kan også leveres i andre kvaliteter og dimensjoner på bestilling.

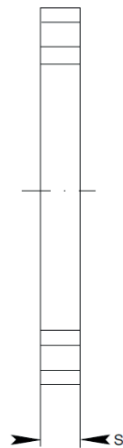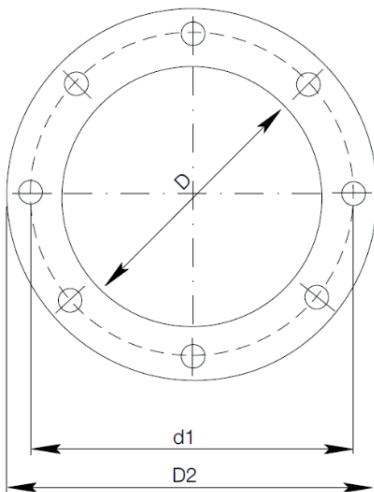

Diameter  
**ø 80 – 600 mm**

Variants  
**20**

Diameter nominal	D (mm)	d1 (mm)	D2 (mm)	Flange width (mm)	Hole size (mm)	Quant. holes
80	83	115	133	25	8	8
100	103	135	153	25	8	8
120	123	155	173	25	8	8
125	128	160	178	25	8	8
140	143	175	193	25	8	8
150	155	185	205	25	8	8
160	165	195	215	25	8	8
180	185	215	235	25	8	8
200	205	235	255	25	8	12
225	230	260	280	25	8	12
250	255	285	305	25	8	12
275	280	310	330	25	8	12
300	305	336	355	25	8	12
315	320	351	370	25	8	12
350	355	389	415	26	10	12
400	405	439	465	30	10	16
450	455	489	515	30	10	16
500	505	540	565	30	10	16
550	555	590	615	30	10	16
600	605	640	665	30	10	16
630	635	670	695	30	10	24
650	655	690	715	30	10	24
700	705	750	785	40	10	24
750	755	800	835	40	10	24
800	805	850	885	40	10	24
850	855	900	935	40	10	24
900	905	950	985	40	10	24
950	955	1000	1035	40	10	24
1000	1005	1050	1085	40	10	24
1100	1105	1147	1185	40	10	28
1200	1205	1247	1285	40	10	24
1250	1255	1300	1335	40	10	28